


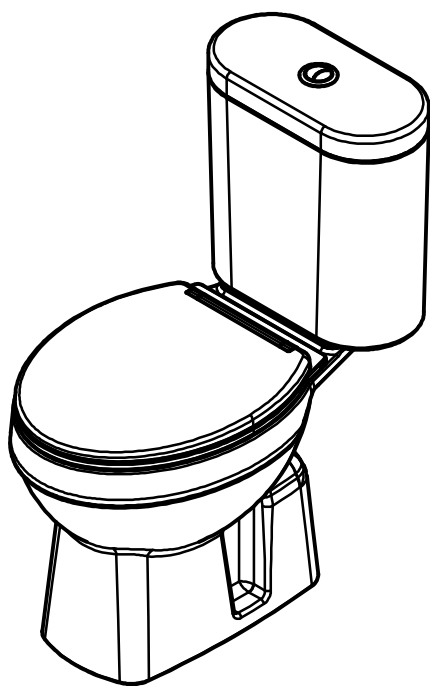

WASHDOWN TWO PIECE TOILET

Installation Instruction


Petunjuk Pemasangan

INSTALLATION INSTRUCTION


Installation Instruction of Two Piece Toilet

1. Before installation, the wall and floor tiles should have been completed, and the pit and water supply lines are reserved.
2. The distance between the center of the pipe and the wall should be in line with the distance from the pits of the toilet.


Installation Steps



1. Prepare the waste drain hole on ceramic tiles according to closer rough in distance. Field condition is finished and clean water supply is installed.




2. Place the rubber gasket on top of the waste drain hole.




3. Install the closet body, screw firmly.


* This installation instruction is suitable for TWC 01 and TWC 09.




4. Install the tank fitting inside the water tank.




5. Install water tank to the body.



6. Install the seat cover.



7. Install the stop valve and connect it to the water tank.




8. Apply sealant around the gap between the body and the floor.

TOILET MAINTAINANCE

Clean

- * Use non-abrasive liquid cleaner to clean the toilet. And rinse thoroughly any chemicals after cleaning. Never use abrasive liquid such as acid, ammonia, bleach, or similar cleaner to avoid corrosion, finish peeling, and/or dull the surface.



- * Use soft sponge or soft cloths to clean the surface. Never use steel or wired brushes that can scratch the surface.




Use

- * Never put solid detergent directly inside water tank. Cover the detergent with multilayer gauze and hung on the inside of the tank, in order to avoid undissolved residue that can affect the flushing.
- * In using two-piece toilet, do not lean and press back against the water tank to avoid cracking.
- * To avoid damage to the seat ring, do not stand or place heavy objects on the cover.



Proposal

- * When the water quality is not good, remove the filter from the bottom part of the tank and clean it regularly.



Warning

- * Avoid direct contact of hard objects with the surface of toilet.
- * The use of groundwater as flushing source, because the water is scarce, it may shorten the water tank lifetime.



REMINDER

1. For your product and safety use, please ask the professional to do installation.
2. It is absolutely prohibited to install a toilet with cement. Installation with cement will cause cracking.
3. Please ensure that the water pipe, angle valve, and water tank have been properly installed.
4. Excessive force on inlet pipe may and will cause damage and crack of the pipe.


We are not responsible for any damage caused by improper installation.

PETUNJUK PEMASANGAN


Petunjuk Pemasangan Toilet Dua Bagian

1. Sebelum pemasangan pastikan dinding toilet, lantai keramik, lubang dan jalur pasokan air telah siap.
2. Jarak antara diameter tengah pipa dengan tembok harus sesuai dengan jarak dari lubang toilet.


Langkah-Langkah Pemasangan



1. Siapkan lubang pembuangan sesuai dengan jarak As (*rough-in*) kloset. Kondisi lapangan sudah finishing dan instalasi air bersih telah tersedia.




2. Pasang gasket ke lubang pembuangan.




3. Pasang body kloset dan baut body.


* Instruksi pemasangan ini dapat diaplikasikan untuk TWC 01 dan TWC 09.




4. Pasang alat tangki (*tank fitting*) di dalam tangki.




5. Pasang tangki ke body.



6. Pasang seat cover.



7. Pasang stop kran dan sambungkan fleksibel ke tangki.




8. Oleskan sealant/nat di sela body kloset dan lantai.

CARA PERAWATAN

Pembersihan

- * Gunakan cairan pembersih non abrasif, dan bilas dengan bersih semua sisa cairan pembersih. Dilarang menggunakan pembersih abrasif seperti asam, amonia, pemutih atau sejenisnya agar toilet tidak korosi, merusak finishing dan kusam.



- * Gunakan kain halus untuk membersihkan permukaan toilet. Dilarang menggunakan sikat besi atau kawat yang bisa menyebabkan goresan.




Penggunaan

- * Dilarang memasukkan deterjen/parfum padat dalam tangki air. Balut deterjen dengan kain kasa tebal dan gantung dalam tangki air agar sisa deterjen yang tidak larut tidak menghambat saat pembilasan.
- * Saat menggunakan tumpuan yang berbeda, harap tidak menggunakan tangki air sebagai sandaran untuk mencegah keretakan/kerusakan pada tangki air.
- * Harap tidak berdiri atau meletakkan benda yang berat pada penutup toilet untuk mencegah kerusakan pada seat ring.



Saran

- * Jika kualitas air yang digunakan kurang baik, bersihkan filter yang terdapat di bawah tangki air secara berkala.



Peringatan

- * Hindari kontak langsung benda keras dengan permukaan toilet.
- * Penggunaan air tanah untuk pembilasan, dikarenakan kelangkaan air, dapat memperpendek waktu penggunaan tangki air.



PERINGATAN

1. Untuk keamanan dalam menggunakan produk, disarankan untuk menggunakan jasa profesional memasang produk.
2. Tidak disarankan untuk memasang toilet menggunakan semen. Pemasangan dengan menggunakan semen akan menyebabkan keretakan pada produk.
3. Pastikan bahwa pipa aliran air, kran dan saluran tangki air telah terpasang dengan benar.
4. Tekanan yang berlebih pada saat memasang pipa pada saluran masuk air akan menyebabkan kerusakan pada pipa.

Kerusakan produk yang terjadi karena pemasangan yang tidak sesuai, bukan menjadi tanggung jawab kami.



www.aer.co.id