

FLOOR STANDING URINAL

Installation Instruction

Petunjuk Pemasangan

INSTALLATION INSTRUCTION

Installation Instruction of Floor Standing Urinal


1. Before installation, the wall and floor tiles should have been completed, and the pit and water supply lines are reserved.
2. The distance between the center of the pipe and the wall should be in line with the distance from the pits of the urinoir.

Installation Steps



1. PREPARATION
 - Turn the water supply OFF.
 - Install or relocate the supply tubing and waste pipe as necessary to conform to the roughing in dimensions.
 - Determine the position of flush valve / sensor valve.
 - Determine the position of the waste pipe. Please make sure the length of the connecting pipe that attached to the waste pipe is according to your needs.
 - Install gasket above the connecting pipe.

* For FU 04, please install the siphon first.

NOTE: Add a little extra length to the connecting pipe to allow gasket to be placed.



**Connecting pipe and gasket are sold separately.

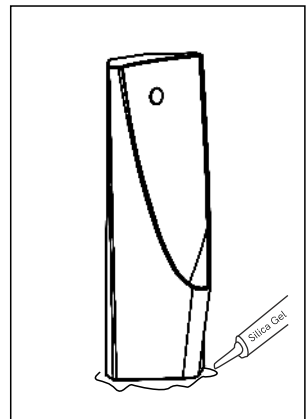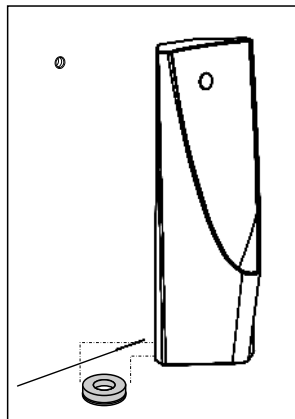

***This installation instruction is suitable for FU 01, FU 02 and FU 04.



2. INSTALLATION

CAUTION:

RISK OF PERSONAL INJURY OR PRODUCT DAMAGE. HANDLE WITH CARE. RISK OF PRODUCT DAMAGE. DO NOT OVERTIGHTEN THE BOLTS.

- Install the flush valve according to the instructions.
- Connect the water supply and complete the waste pipe connections.
- Place the urinals on right position.
- Turn on the water supply and check whether there are any leaks.
- Use the sealant to stick every corner of the urinals to wall and floor, let it dry.
- Push the flush valve and check the entire installation for leaks.

* This illustration below is for floor standing urinal with back inlet sensor flush.
More information can be found on Sensor Urinal Flush Manual Instruction

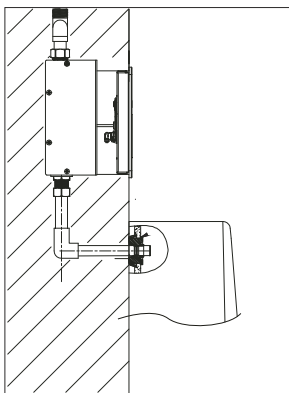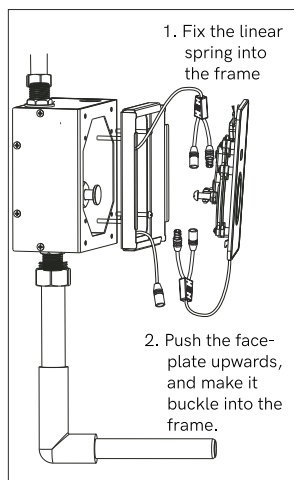

Cleaning & Maintenance



To keep the product clean & shining, follow the steps as below:

- o Flush with clean water & dry with soft cloth only.
- o If any dirt, clean with soft liquid or transparent glass detergent.
- o Do not use any scrubbing detergent, polisher, sane-cloth, paper tissue or scraper.
- o Do not use acid detergent, indissolvable grain-like detergent or soap.

PETUNJUK PEMASANGAN

Petunjuk Pemasangan Urinoir Lantai

1. Sebelum pemasangan, pastikan dinding urinoir, lantai keramik, lubang, dan jalur pasokan air telah siap.
2. Jarak antara tengah pipa dengan tembok harus sesuai dengan jarak dari lubang urinoir.


Langkah-Langkah Pemasangan

1. PERSIAPAN



- Matikan saluran air.
- Pasang/pindahkan jalur pasokan air dan pipa pembuangan untuk keperluan penyesuaian dimensi yang ada.
- Tentukan posisi katup flush.
- Tentukan posisi pipa pembuangan air. Perhatikan panjang pipa sambungan yang akan dipasangkan pada pipa pembuangan air.
- Pasang gasket diatas pipa sambungan.

* Khusus untuk produk FU 04. Pasang siphon terlebih dahulu.

CATATAN: Tambahkan sedikit panjang pada pipa sambungan untuk penempatan gasket.



**Pipa sambungan dan gasket dibeli secara terpisah

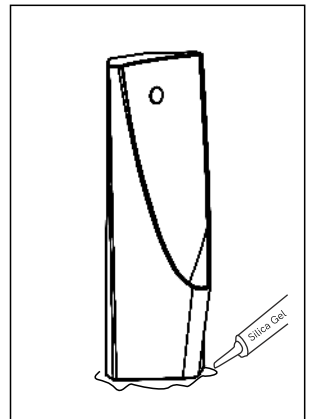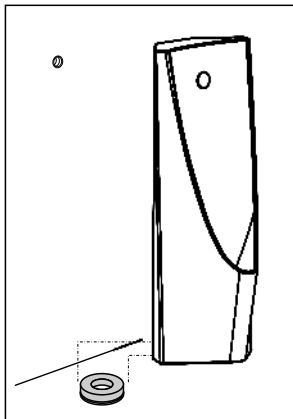

*** Instruksi pemasangan ini dapat diaplikasikan untuk FU 01, FU 02 dan FU 04.


2. PEMASANGAN

PERHATIAN:

RESIKO CEDERA PRIBADI DAN KERUSAKAN PRODUK. TANGANI DENGAN HATI-HATI. JANGAN TERLALU MENGENCANGKAN BAUT.

- Pasang katup flush sesuai dengan instruksi.
- Sambungkan saluran air dan selesaikan sambungan pipa pembuangan air.
- Dudukkan Urinoir dengan posisi yang benar.
- Nyalakan saluran air dan cek apakah ada kebocoran atau tidak.
- Sealant seluruh sudut urinoir ke tembok dan ke lantai, biarkan kering.
- Tekan flush valve dan cek keseluruhan pemasangan, apakah terjadi kebocoran atau tidak.

* Ilustrasi dibawah ini berlaku untuk urinoir dengan *back inlet sensor flush*. Untuk informasi lebih lanjut dapat dilihat pada petunjuk pemasangan *sensor urinal flush*.

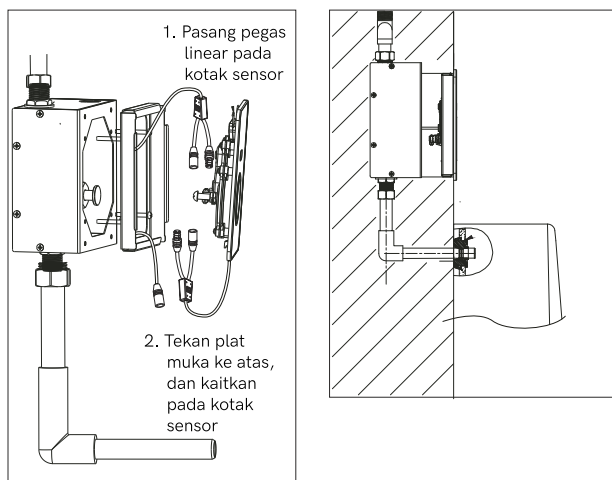

Pembersihan & Perawatan



Untuk menjaga produk tetap bersih dan mengkilap, ikuti langkah-langkah di bawah ini:

- o Siram dengan air bersih dan keringkan dengan kain lap yang lembut.
- o Jika terdapat kotoran, bersihkan dengan cairan yang tidak keras atau dengan deterjen kaca transparan.
- o Jangan menggunakan deterjen gosok, penggosok, kertas tisu, atau pengikis/pengikir.
- o Jangan menggunakan butiran dengan zat kimia yang sulit larut seperti deterjen dan sabun.



www.aer.co.id